


Classic Low Pitch Roof Order Form

All dimensions to be **INTERNAL FRAME SIZE**, showing desired bar centres

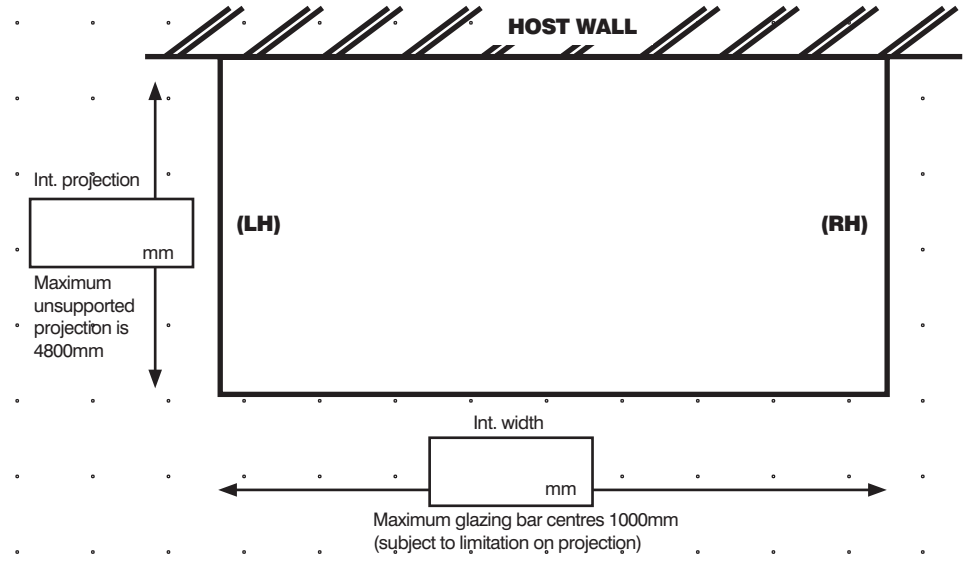

Roof site inspection
Pose code
Frame thickness

Abutment bars
Please indicate wall side details.

Box gutter
Please attach the separate box gutter order form along with this completed sheet

Roof vents
Please indicate location

Roof Pitch
Min 2.5°
Max 10.0°

Account No.

Company Name >

Order Number >

Job Reference >

Company Contact >

Telephone No. >

Fax No. >

Delivery Address >

Delivery Date Req >

Quotation Ref >

COLOUR/FOIL OPTIONS

EXTERNAL COLOUR				
White	Deeplas (blue white)	Mahogany	Light Oak	Rosewood
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

INTERNAL COLOUR				
White	Deeplas (blue white)	Mahogany	Light Oak	Rosewood
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

GLAZING BAR OPTIONS		
TOP CAPPINGS		
Standard Caps	Chambered Dome	Chambered Bevel
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

UNDERCLADDINGS	
Standard	Decorative
<input type="checkbox"/>	<input type="checkbox"/>

GLAZING OPTIONS		
POLYCARBONATE THICKNESS		
25mm	35mm	35mm polycarbonate roofs - 972mm is the maximum dimension from internal frame lie to the first transom bar
<input type="checkbox"/>	<input type="checkbox"/>	

POLYCARBONATE COLOUR					
Clear	Opal	Bronze	Bronze/Opal	Heatguard	Unglazed (for 24mm glass)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

GLASS					
ANTI SUN (1.2)		ANTI SUN (1.5)		CLEAR	
A1 (Blue)	A2 (Grey)	B1 (Blue)	B2 (Grey)	C1 (1.2)	C2 (1.5)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CONSERVAGLASS					
Blue			NC		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

SPACER BAR COLOUR		ROTABOND SEALANT	
Silver	Bronze	White	Black
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Gold	White		
<input type="checkbox"/>	<input type="checkbox"/>		

ROOF OPTIONS LEFT HAND (LH) & RIGHT HAND (RH)			
Firring	Short abutment	Full abutment	Hipped end (Plus)
<input type="checkbox"/> LH	<input type="checkbox"/> LH	<input type="checkbox"/> LH	<input type="checkbox"/> LH
<input type="checkbox"/> RH	<input type="checkbox"/> RH	<input type="checkbox"/> RH	<input type="checkbox"/> RH
short abutment = 1/2 internal projection			

FIRRING REINFORCEMENT			
None	Aluminium	Aluminium & Steel	Raked Frame
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
(not supplied by Ultraframe)			

CONSERVAFLASH	
Yes	No
<input type="checkbox"/>	<input type="checkbox"/>

GUTTERING	
Left Side	Right Side
<input type="checkbox"/>	<input type="checkbox"/>

ROOF VENT OPTIONS		
MANUAL		
Chrome	Brass	Pole
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

ELECTRIC		ANCILLARIES	
Switch	Thermo/Rain Sensor		
<input type="checkbox"/>	<input type="checkbox"/>		

PLEASE SIGN BELOW & FAX BACK TO 0870 414 1012

.....

DATE